



## VV-8

### VERTICAL REFRIGERATED DISPLAY CASES



- ✓ Pre-painted steel cabinet with polyurethane insulation, cyclopentane blown, HCFC-free.
- ✓ Swing-type Low-E double-pane tempered glass door. Self-closing with magnetic gasket.
- ✓ High-efficiency compressor with copper refrigeration circuit, silver-brazed.
- ✓ Removable condensing unit for easy maintenance.
- ✓ 100% copper refrigeration system.

#### Certifications

I 4501  
S 1401  
O 9001



## VERTICAL REFRIGERATED DISPLAY CASES

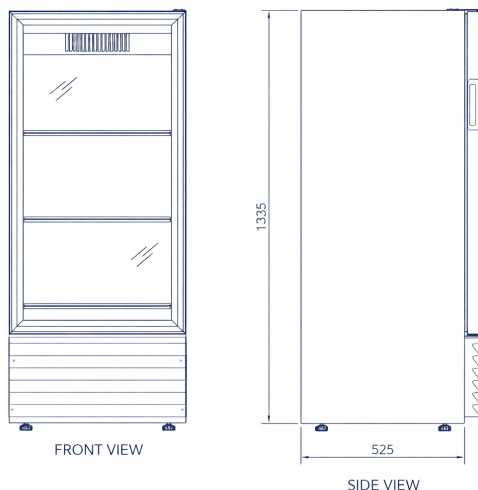

Dimensions	Length (mm)	Depth (mm)	Height (mm)
<b>External</b>	570	575	1405
<b>Internal</b>	420	485	975
<b>Packaging</b>	590	595	1440

Weight	Net Kg	Gross (Kg)
VV-8	71	78

Interior Temperature	Ambient Condition
0°C / 5°C	32 °C / 65%RH

Capacity	Gross (L)	Net (L)
VV-8	241	192

Capacity	Cans	Bottles
VV-8	245u 350ml	119u 500ml

Shelf / Basket	Width (mm)	Depth (mm)
3 adjustable shelves	476	405

Commercial Reference - Compressor	Condenser Type
1/2 HP	Finned condenser
<b>Refrigerant</b>	R-290

Container Capacity	
Cont.20'	30 units
Cont.40'	60 units
Cont.40 HC	

Electric Data	
<b>Voltage (V)</b>	220
<b>Frequency (Hz)</b>	50
<b>Current (A)</b>	1
<b>Power (W)</b>	196
<b>Energy Consumption (25°C / 60%RH)</b>	1,42 KWh/día

Optional Accessories
Branding
Double LED Lighting
Sign Holder
Electronic Control
Helical condenser

Features
Hot-gas water evaporation pan.
Efficient refrigeration system with forced-air circulation.
Temperature control with adjustable thermostat.
Condenser and evaporator with copper tubes and aluminum fins.
Integrated interior LED lighting. Enables 20% electrical energy savings.
Adjustable plastic-coated steel rod shelves. Base with adjustable glides.

**Mimet Commitment**

**100% TESTED**  
Each unit is individually tested to guarantee quality and performance

**100% TRACEABILITY**  
Every component and process is recorded to ensure full traceability throughout the product's lifecycle.

Certifications  
**I 45001**  
**S 14001**  
**O 9001**